

eisysvisual

VIP Framed Whiteboards/Chalkboards/Noticeboards/Glassboards and Combiboards Mounting Instructions



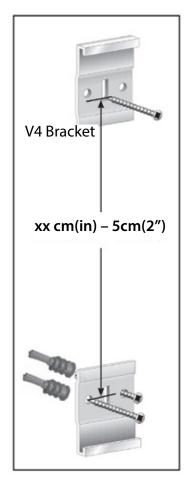

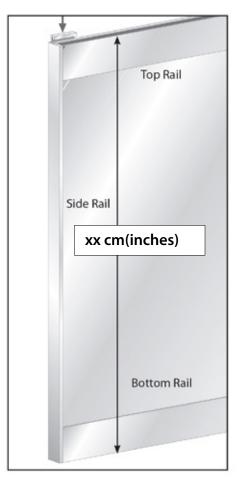

length in cm(inches)	# of V4 brackets
up to 120 (47.5")	2
121 (47.5") to 200 (79")	3
201 (79.1") to 350 (138")	4
351 (138.2") to 475 (187")	5
500 (197") +	6



Items included (with each set of V4 bracket)	
3ea 3ea	75lb screw-type hollow wall anchor 2" #8 Self-tapping Pan head screws
	ANT! To be properly secured, the board must ed in all brackets at both top and bottom.

See notes on page 2 for more information



VIP Framed Whiteboards/Chalkboards/Noticeboards/Glassboards and Combiboards Mounting Instructions

Notes on installation:

- 1. Each frame is comprised of a TOP RAIL, BOTTOM RAIL and 2 SIDE PROFILES
- 2. The provided mounting hardware (V4 Brackets) <u>MUST</u> attach to both TOP BOTTOM RAILS as shown in diagram on page 1.
- 3. The number of total brackets per board varies by length as shown in "Sets per V4 Brackets Table" on page 1.
- 4. Outer mounting brackets <u>MUST</u> be positioned no more than 12mm (.5") from each edge of the frame at top and bottom.
- 5. Shims may be needed if the wall is not plumb and straight.
- 6. Rubber bumpers may be needed behind the boards to eliminate rattles or movement from vibrations.
- 7. Always screw into studs whenever possible.